



Piezoelectric Accelerometer (Triaxial/Shock)

Model: CA-YD-3141

Manufacturer: Sinocera Piezotronics Inc.

Distributor: LABSEN




Features:


- Triaxial output, simultaneous X,Y,Z vibration measurements
- Mounting by a middle through hole and 2-M5
- Passive, direct piezoelectric effect

Specifications:


Sensitivity (20±5°C)	~10 pC/g
Measurement Range(pk)	2000 g
Max Transverse Sensitivity	≤5 %
Frequency Response (±5%)	1 ~ 6,000 Hz
Mounting Resonant Frequency	30,000 Hz
Operating Temp. Range	-40~+150 °C
Temperature Response	See Graph
Shock Limit(pk)	5,000 g
Transient Temperature Response	8 mg/°C(0.3Hz)
Magnetic Sensitivity	0.5 g/T
Base Strain Sensitivity	4 mg/με
Case Isolation	> 10 ⁹ Ω
Capacitance	1500 pF
Mounting	φ5 through hole and 2-M5
Sensing Element	Piezoelectric Ceramics
Sensing Geometry	Shear
Case Material	Titanium Alloy
Weight	17 g
Output	X, Y, Z Triaxial L5
Accessories	
Certificate	Calibration parameter, frequency response
M5 Stud, protection cap	2/3
2m, L5/L5 STYV-1	3

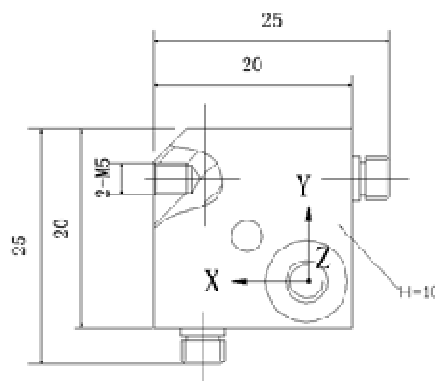

Dimensions

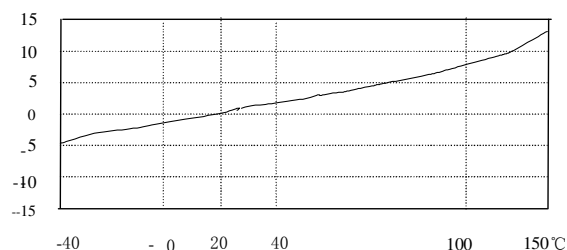

Temperature Response

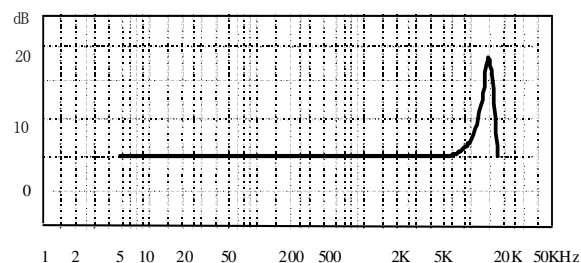

Frequency Response

LABSEN® - Laboratory and Sensor Technologies

25/15 Bellevue Terrace Street
Saint Lucia, QLD 4067, Australia

ABN 41 242 801 624
<http://labsentec.com.au>

Email: enquiry@labsentec.com.au
Phone: +61 468 468 988