



Piezoelectric Pressure Transducer

Model: CY-YD-203

Manufacturer: Sinocera Piezotronics Inc.

Distributor: LABSEN




Features:


- Small size, light weight
- measurement of pipeline pressure, burst pressure
- Can be on Static Calibration
- Wide frequency response, large stiffness

Specifications:

Pressure sensitivity(20±5°C)	~100 pC/MPa
Measurement Range	0~30 MPa 0~60 MPa Optional
Overload	120%
Non-linearity	<1% FS
Hysteresis	<1% FS
Repeatability	<1% FS
Isolation Resistance	>10 ¹³ Ω
Capacitance (1000Hz)	7 pF
Resonant Frequency	>100 kHz
Operating Temperature	-40~+150 °C
Case Material	High strength stainless steel
Weight	6 g
Mounting	Transition fixture
Sensing Element	Quartz
Output	L5
Accessories	
Certificate	Calibration parameters
Protective cap	One
Sealing gasket	one
L5 /L5 STYV-1 Cable	one(2m)

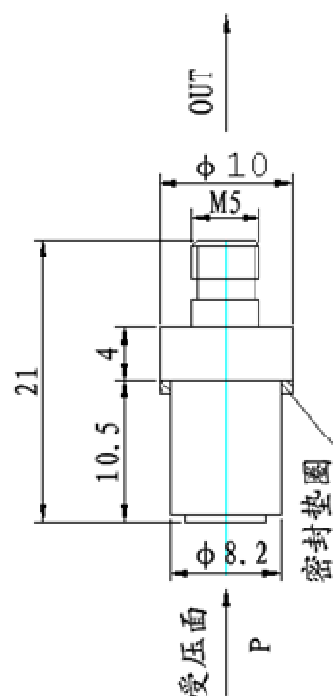

Dimensions

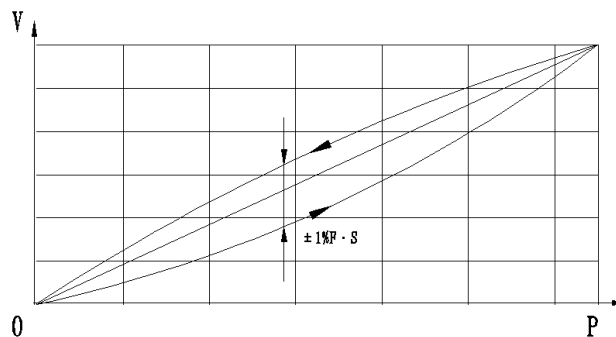

Typical Static Error Curve

LABSEN® - Laboratory and Sensor Technologies

25/15 Bellevue Terrace Street
Saint Lucia, QLD 4067, Australia

ABN 41 242 801 624
<http://labsentec.com.au>

Email: enquiry@labsentec.com.au
Phone: +61 468 468 988