



## Piezoelectric Pressure Transducer

Model: CY-YD-214

Manufacturer: Sinocera Piezotronics Inc.

Distributor: LABSEN




### Features:


- Wide Range
- Measurement of pipeline pressure, burst pressure
- Can be on Static Calibration
- Wide frequency response, large stiffness

### Specifications:

Pressure sensitivity(20±5℃)	~30 pC/MPa
Measurement Range	0~200 MPa
Overload	120%
Non-linearity	<1% FS
Hysteresis	<1% FS
Repeatability	<1% FS
Isolation Resistance	>10 <sup>13</sup> Ω
Capacitance (1000Hz)	5 pF
Resonant Frequency	>150 kHz
Operating Temperature	-40~+150 °C
Case Material	High strength stainless steel
Weight	20g
Mounting	M10×1
Sensing Element	Quartz
Output	L5
Accessories	
Certificate	Calibration parameters
Protective cap	One
Sealing gasket	one
L5 /L5 STYV-1 Cable	one(2m)

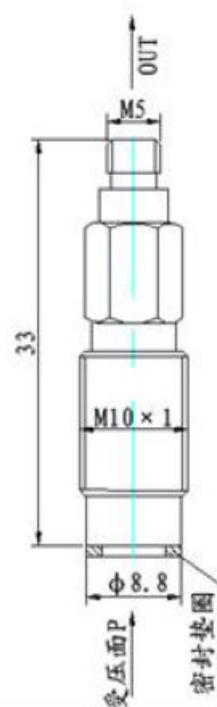

Dimensions

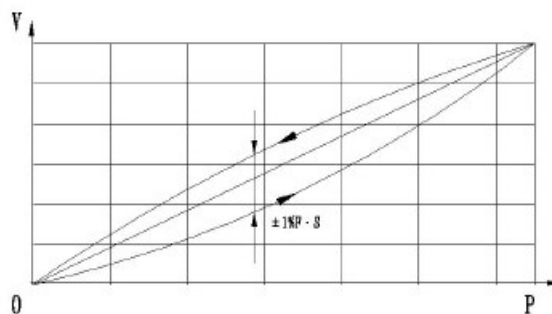

Typical Static Error Curve

### LABSEN® - Laboratory and Sensor Technologies

25/15 Bellevue Terrace Street  
Saint Lucia, QLD 4067, Australia

ABN 41 242 801 624  
<http://labsentec.com.au>

Email: [enquiry@labsentec.com.au](mailto:enquiry@labsentec.com.au)  
Phone: +61 468 468 988